

48V100Ah



RACK MOUNTED LI-ION BATTERY



SAFETY

- + Prismatic LFePO4 cells, Longer cycle life and much more safety.
- + Low voltage system, safety for application.
- + UN38.3, IEC certification for system.



DESIGN

- + Standard 19" rack design.
- + Flexible and easily installation.
- + -20~+55°C widely temperature range.
- + Maintenance free.



SCALABILITY

- + Parallel support for more energy.
- + Optional accessories for LCD display, Anti-theft, remote monitoring purpose.



BATTERY MANAGEMENT SYSTEM

- + Independent protection for charge and discharge.
- + SOC, SOH display and PC software for detailed operation.
- + OVP, LVP, OCP, OTP, LTP protection.
- + RS232, RS485 communication port.

48V 100Ah

RACK MOUNTED LI-ION BATTERY

Specification






Model	R-LFP48V100Ah
Part Number	8110480010001
Nominal voltage [V]	48
Cell type and connection	LFP 50AH, 2P15S
Nominal capacity [Ah]	100
Total energy [KWh]	4.80
Max. charging current [A]	100
Charging voltage [V]	51.8~54.7
Max. discharging current [A]	100
End of discharge voltage [V]	42
Product weight [Kg]	50
Product dimension [W*D*H]	442*450*175
Protection class	IP40
Operating humidity	0-95 %RH (No condensing)
Operating temperature range	Charge: 0 ~ +50 °C; Discharge: -20 ~ +55 °C
Communication interface	RS232, RS485, CAN
Cycle Life	>3500@100%DOD
Protection	Over voltage , Low voltage, Over current, Over Temperature, Low Temperature, Short circuit
Certification	UN38.3, CE
Parallel Support	Yes, Max. 16 Sets
Optional Accessories	LCD Display, MCB (125A), Gyro anti-theft, SNMP

Li-ion Battery


R-LFP48V100Ah Dimension

Part Number: 8110512010001
8110480010001

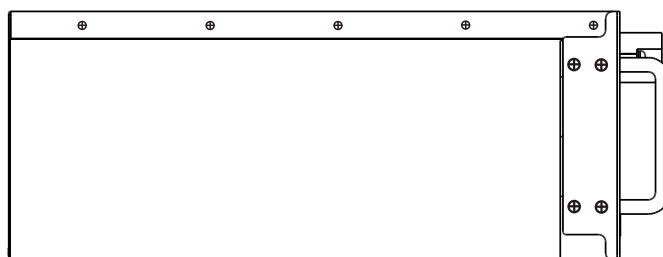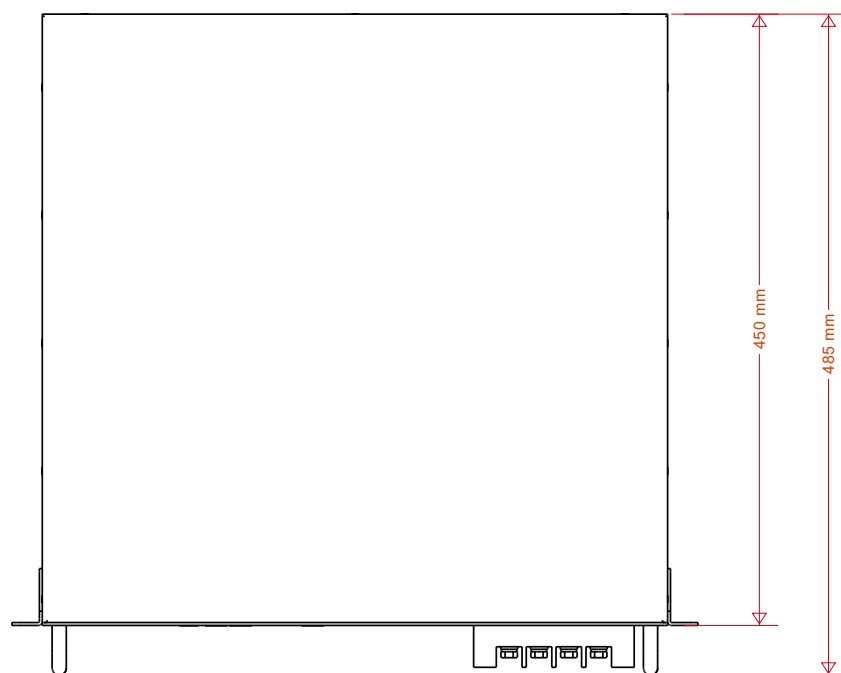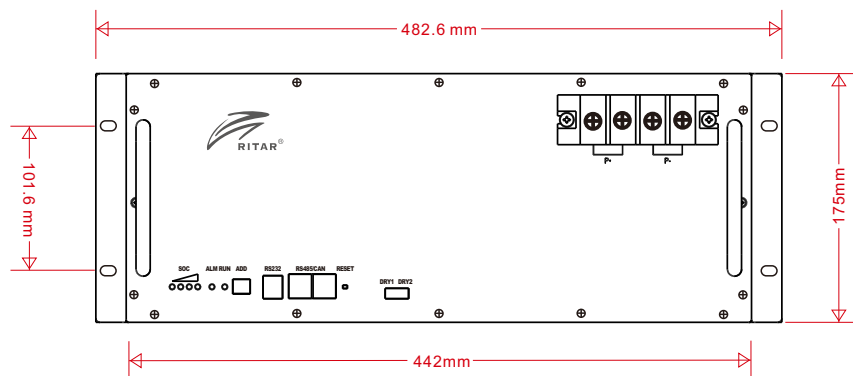


48V RACK MOUNTED LI-ION BATTERY


Different Discharge Rate and Temperature Characteristic

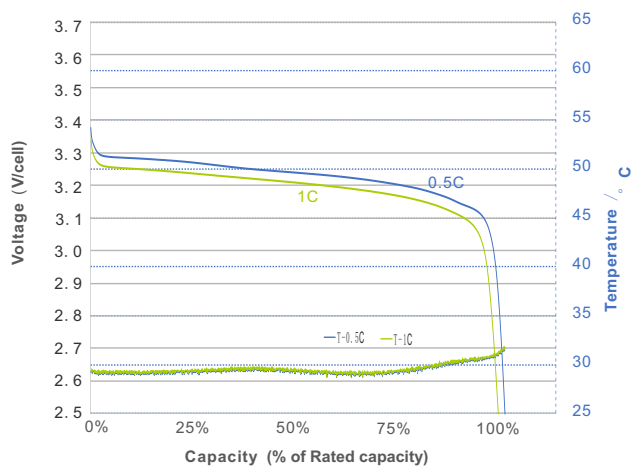


Different Charge Rate and Temperature Characteristic

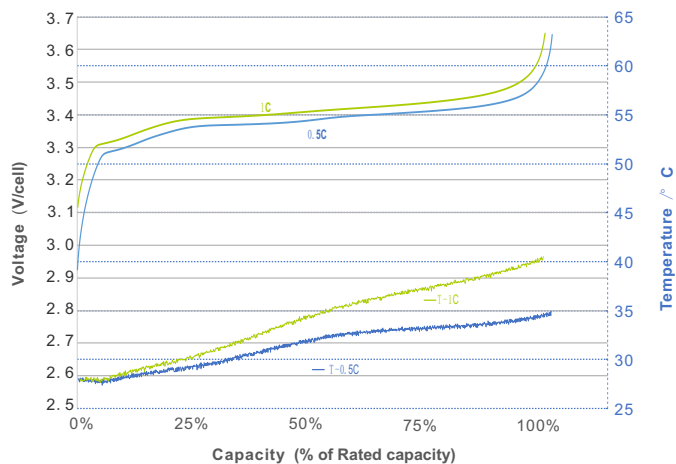


Different Temperature Self Discharge Curve

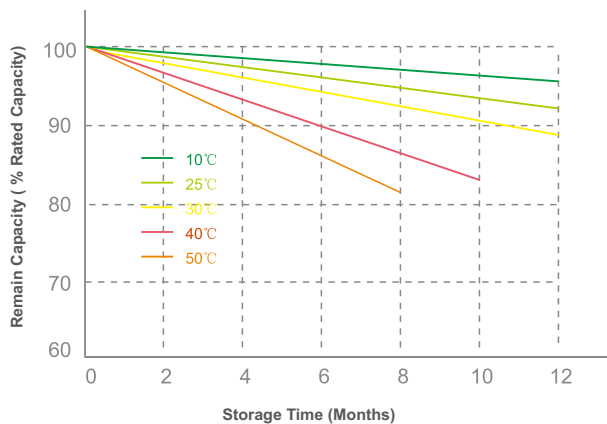

Capacity with Different Temperature

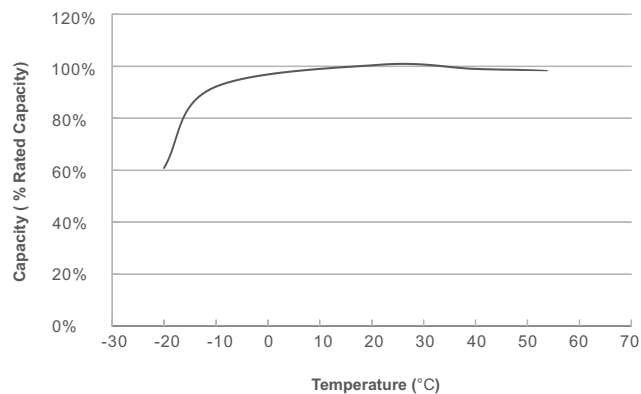

Typical Recharge Time

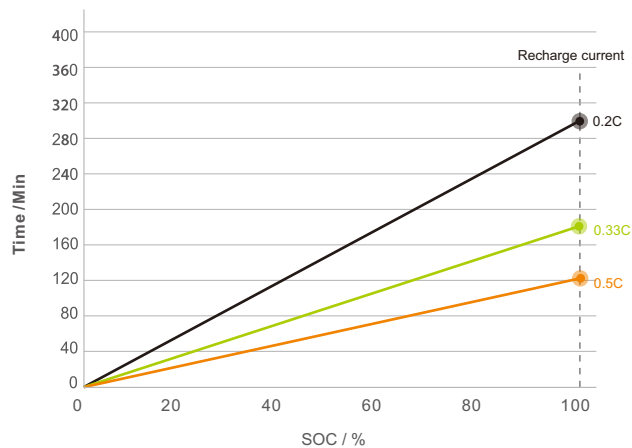

Typical Cycle Life

